

Inlay Features


- Rain RFID compliant
- Long read range
- Supports Impinj dies

Applications

- Apparel applications
- Item level logistics

Inlay Layout and Dimensions

	SKL4020_6
Antenna width	20 mm \pm 0.5 mm (0.79 \pm 0.02 in)
Antenna length	40 mm \pm 0.5 mm (1.54 \pm 0.02 in)
Lengthwise pitch	50.8 mm \pm 0.5 mm (2.00 \pm 0.02 in)
Web width	37.5 mm \pm 0.5 mm (1.48 \pm 0.02 in)

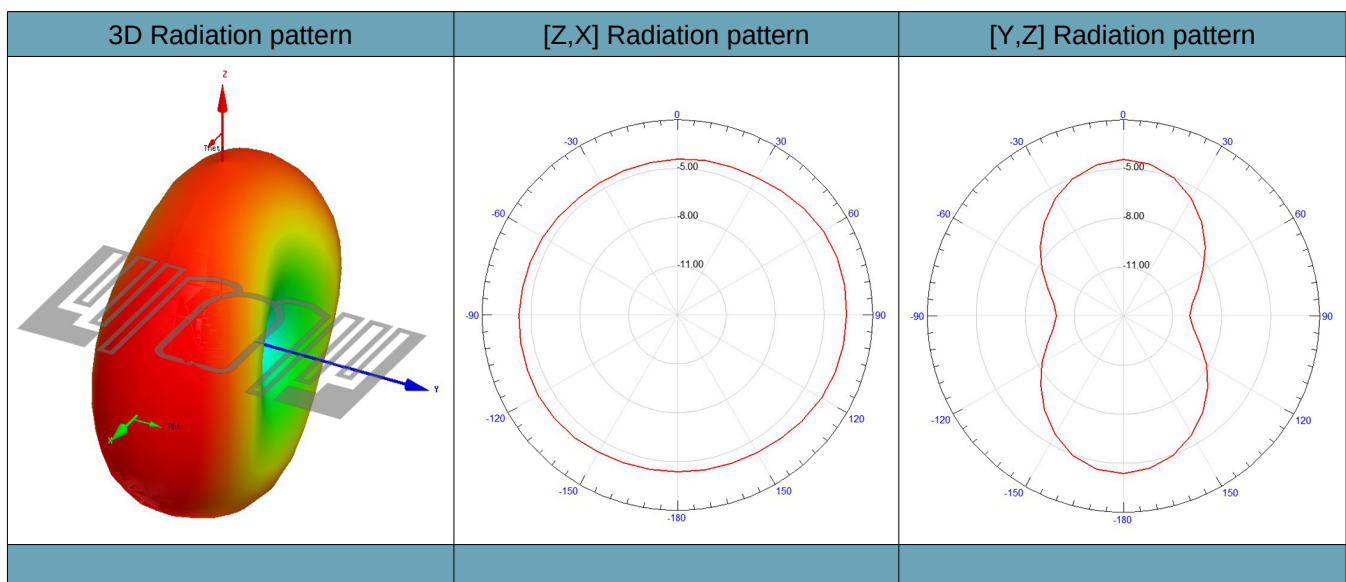

Inlay Composition

Composition	Material	Thickness* [μm]
Top	Aluminium	9 ± 5%
Support	Polyester PET	38 ± 5%

* Overall thickness depends on the IC. For IC thickness please refer to the "Available ICs" table

Available ICs

	Impinj Monza R6	Impinj Monza R6-P	Impinj Monza S6-C	
Product code	SKL40206-MZ6	SKL40206-MZ6P	SKL40206-MZ6C	
Operating frequency	860 ÷ 960 MHz			
Standard compliance	EPC Class 1 Gen2 – ISO 18000-6C			
Thickness	109μm ± 15μm	109μm ± 15μm	109μm ± 15μm	
Operating temperature	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C	
EPC code	96 bits serialized	96/128 bits serialized	96 bits serialized	
User memory	-	64/0 bits	32 bits + 16 bit counter	
TID (locked)	96 bits	96 bits	96 bits	
Reserved memory	- (kill & lock not possible)	128 bits (kill & access pwd + config bits)	128 bits (kill & access pwd + config bits)	
Write endurance	100 000 cycles	100 000 cycles	100 000 cycles	
Data retention	50 years	50 years	50 years	

General supply conditions

Reel dimensions	Internal diameter	76 mm
	External diameter	< 300 mm (custom sizes available upon request)
Reel quantity	Inlay per reel	10 000 ± 10% (custom sizes available upon request)